



CVD Series

Card Vending Dispenser

Installation Guide

Use of Materials Limitations

International Currency Technologies Corporation (ICT) all rights reserved.

All materials contained are the copyrighted property of ICT.

All trademarks, service marks, and trade names are proprietary to ICT.

ICT reserves the right at all times to disclose or to modify any information as ICT deems necessary to satisfy any applicable law, regulation, legal process or governmental request, or to edit, refuse to post or to remove any information or materials, in whole or in part, in ICT's sole discretion.

Contents

1. Introduction.....	2
1-1. Overview.....	2
1-2. Features.....	2
2. Specifications.....	3
General.....	3
Electrical.....	3
Mechanical.....	3
3. Packing List.....	4
4. Dimensions.....	5
5. Installation.....	7
5-1. Harness Application.....	7
5-1-1. Pin Assignment.....	10
5-1-2. I/O Circuits.....	14
5-2. DIP Switch Setting.....	17
5-3. Time Chart.....	19
5-4. Communication Protocol.....	25
6. Operation.....	26
6-1. How to adjust thickness of cards.....	26
6-2. How to fill cards.....	27
6-3. Low Level Sensor Function.....	28
7. Maintenance.....	30
8. Troubleshooting.....	31

1. Introduction:

1-1. Overview

CVD series is a card vending dispenser which is based on the design of CVD series. The machine features low level sensor function with Standard type or Drop type as a reliable card dispenser which is able to work steadily and fast approx.1 second per card.

1-2. Features

- Low level sensor function (optional).
- Cards easy filling.
- Pulse, Hopper, and RS232 Interface Available.
- 12V and 24V acceptable.
- Card capacity available from 300 to 1000 cards.
- Standard and Drop type card dispenser available.

2. Specification:

General

Card Dispensing Time	Approx. 1 second/ card
Interface	Hopper, Pulse, RS232



Installation: Indoor use only!!

Electrical

Power Source	12V DC (11.4~12.6V DC) 24V DC (22.8~25.2V DC)
Power Consumption	12V- Standby : 0.5 A, 6W Operation: 1.25A, 15W Maximum: 2.5 A, 30W 24V- Standby : 0.16A, 4W Operation: 0.83A, 20W Maximum: 1.66A, 40W
Operation Environment	Operation Temperature: -10°C~40°C Storage Temperature : -20°C~70°C Humidity: 30%~90% RH(non-condensation)

Mechanical

Dispensing Way	Standard Type : (CVD- 300 E/ EH/ ER/ EL/ ELR) (CVD-1000 E/ EH/ ER/ EL/ ELR) Card will be held in slot when dispensing. Drop Type : (CVD- 300 DE/ DEL/ DELR) (CVD-1000 DE/ DEL/ DELR) Card will be dropped out from slot when dispensing.
-----------------------	---

3. Packing List:

Main	Card Vending Dispenser
Accessory	CVD Series Installation Guide Harness: Refer to 5-1

Material: Plastic, Paper Cards
 Size: Thickness 0.2~1.0mm(max.)
 Width 53~58 ±0.5mm
 Length 76~90 ±0.5mm

Outline Dimension
 Standard Type: Refer to page.5
 Drop Type : Refer to page.6

Card Capacity
 CVD- 300 Series: Approx. 300 Cards
 CVD-1000 Series: Approx.1000 Cards
 (a card thickness of 0.2mm)

Weight
 CVD- 300 Series: Approx.1.9kg
 CVD-1000 Series: Approx.3.2kg

Install Angle Vertical

4. Dimensions:

Standard Type

CVD-300 / 1000 (E/ EH/ ER)

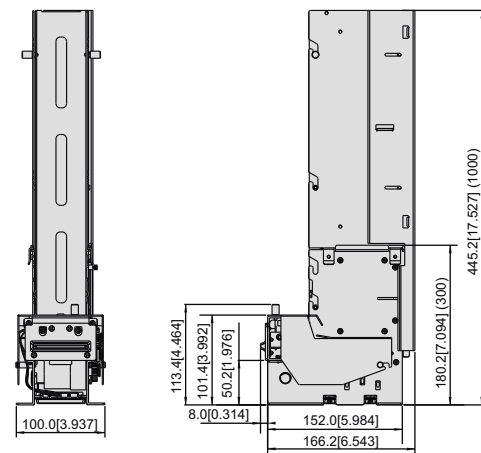


Figure.1

Unit : mm [inch]

(With Low Level Sensor)

CVD-300/ 1000 (EL/ ELR)

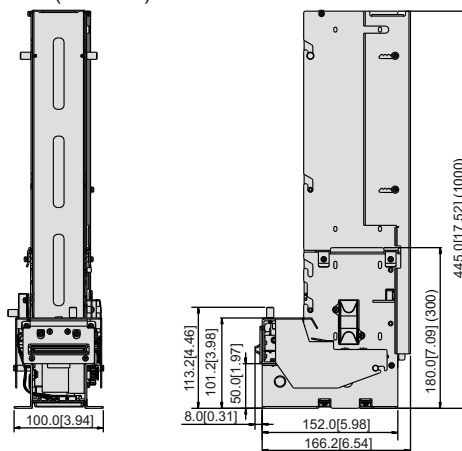


Figure.2

Unit : mm [inch]

Drop Type

CVD-300 / 1000 (DE)

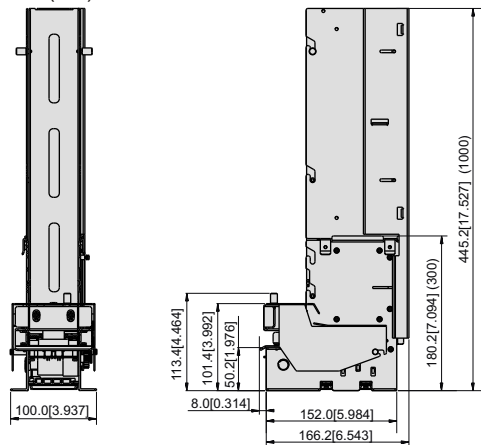


Figure.3

Unit : mm [inch]

(With Low Level Sensor)

CVD-300/ 1000 (DEL/ DELR)

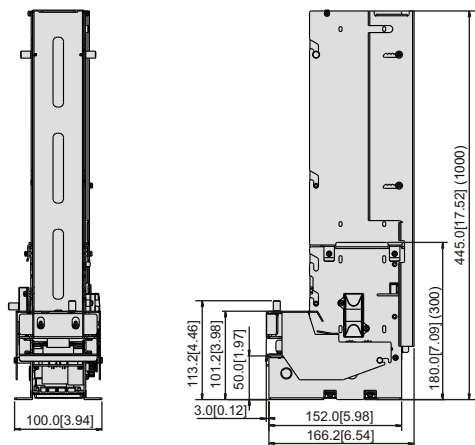


Figure.4

Unit : mm [inch]

5. Installation:**5-1. Harness Application**

Power Supply.

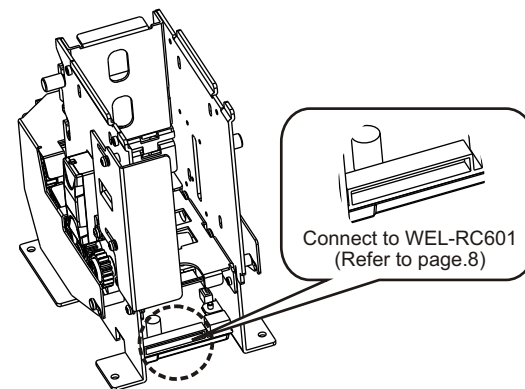


Figure.5

RS232 Only.

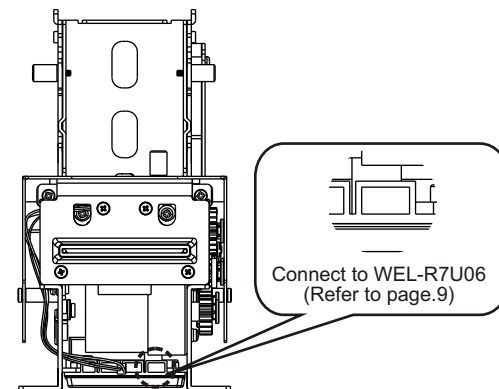


Figure.6

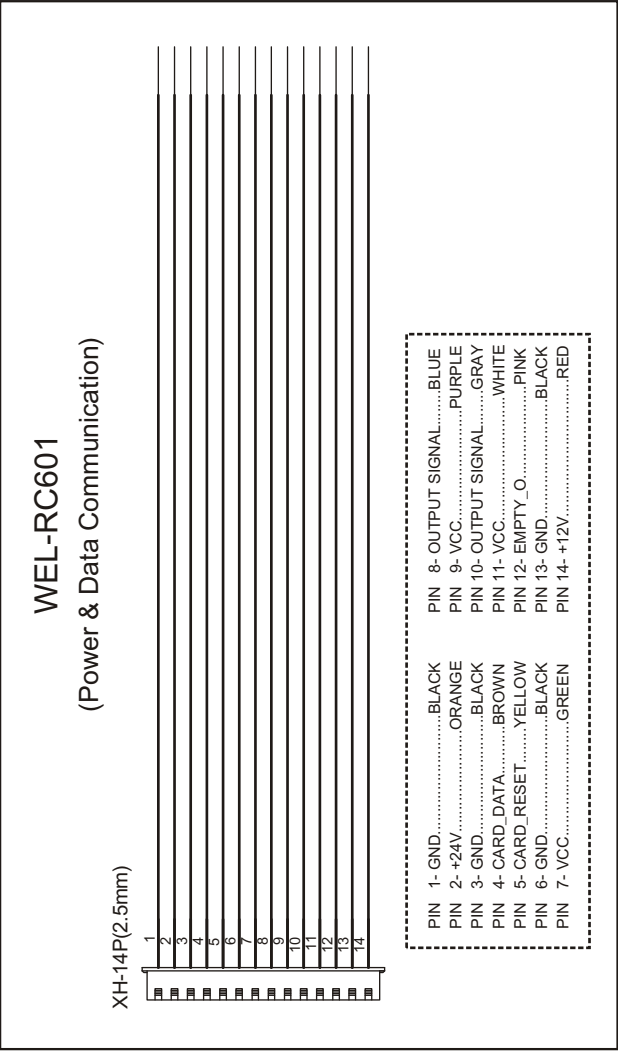


Figure.7

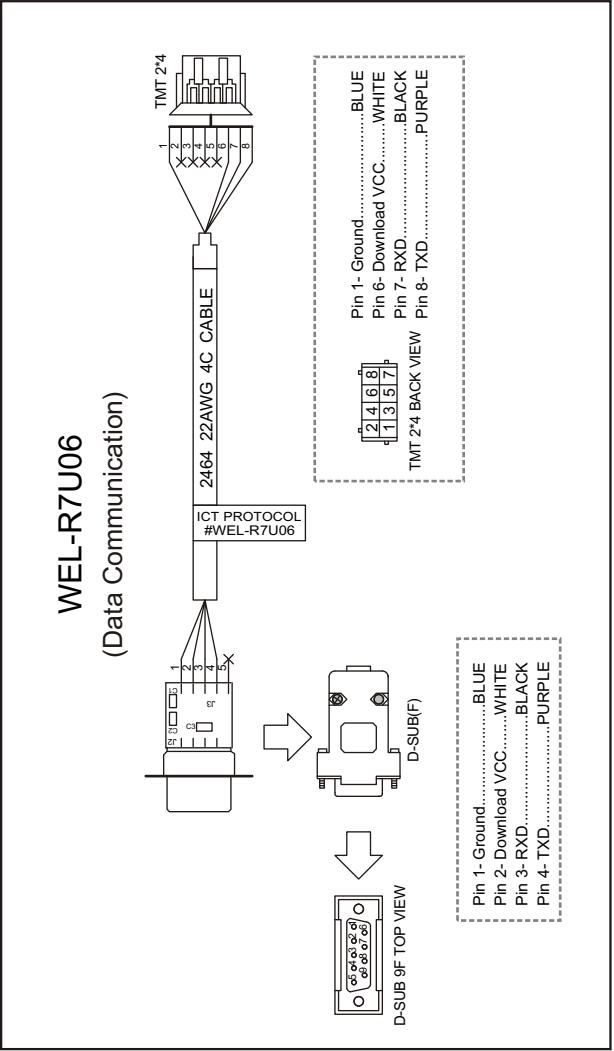


Figure.8

5-1-1. Pin Assignment

Pulse/ Hopper Signal Mode

<For E/DE models only>

Table.1

Pin	Assign	Function		Harness Color (WEL-RC601)
1	CN_ 1	POWER SUPPLY	GND	BLACK
2	CN_ 2	POWER SUPPLY(option)	+24V	ORANGE
3	CN_ 3	POWER SUPPLY	GND	BLACK
4	CN_ 4	CARD_DATA	Input signal controller	BROWN
5	CN_ 5	CARD_RESET	Input signal controller	YELLOW
6	CN_ 6	POWER SUPPLY	GND	BLACK
7	CN_ 7	VCC	Ouput DC+5V	GREEN
8	CN_ 8	BUSY_O (for E models only)	Ouput signal controller	BLUE
		READY_O (for DE models only)		
9	CN_ 9	VCC	Ouput DC+5V	PURPLE
10	CN_ 10	READY_O (for E models only)	Ouput signal controller	GRAY
		BUSY_O (for DE models only)		
11	CN_ 11	VCC	Ouput DC+5V	WHITE
12	CN_ 12	ERROR_O AND EMPTY_O	Ouput signal controller	PINK
13	CN_ 13	POWER SUPPLY	GND	BLACK
14	CN_ 14	POWER SUPPLY(option)	+12V	RED

❖ Can be selected +12V or +24V.

<For EH models only>

Table.2

Pin	Assign	Function		Harness Color (WEL-RC601)
1	CN_ 1	POWER SUPPLY	GND	BLACK
2	CN_ 2	POWER SUPPLY(option)	+24V	ORANGE
3	CN_ 3	POWER SUPPLY	GND	BLACK
4	CN_ 4	CARD_DATA	Dispensing signal	BROWN
5	CN_ 5	CARD_RESET	Input signal controller	YELLOW
6	CN_ 6	POWER SUPPLY	GND	BLACK
7	CN_ 7	VCC	Ouput DC+5V	GREEN
8	CN_ 8	CREDIT	Ouput signal controller	BLUE
9	CN_ 9	VCC	Ouput DC+5V	PURPLE
10	CN_ 10	N/A	N/A	GRAY
11	CN_ 11	VCC	Ouput DC+5V	WHITE
12	CN_ 12	ERROR_O AND EMPTY_O	Ouput signal controller	PINK
13	CN_ 13	POWER SUPPLY	GND	BLACK
14	CN_ 14	POWER SUPPLY(option)	+12V	RED

❖ Can be selected +12V or +24V.

RS232 Signal Mode

<For Low Level Sensor models only>

Table.3

Pin	Assign	Function		Harness Color (WEL-RC601)
1	CN_ 1	POWER SUPPLY	GND	BLACK
2	CN_ 2	POWER SUPPLY(option)	+24V	ORANGE
3	CN_ 3	POWER SUPPLY	GND	BLACK
4	CN_ 4	CARD_DATA	Dispensing signal	BROWN
5	CN_ 5	CARD_RESET	Input signal controller	YELLOW
6	CN_ 6	POWER SUPPLY	GND	BLACK
7	CN_ 7	VCC	Output DC+5V	GREEN
8	CN_ 8	CREDIT	Output signal controller	BLUE
9	CN_ 9	VCC	Output DC+5V	PURPLE
10	CN_10	LOW LEVEL SIGNAL	Output signal controller	GRAY
11	CN_11	VCC	Output DC+5V	WHITE
12	CN_12	ERROR_O AND EMPTY_O	Output signal controller	PINK
13	CN_13	POWER SUPPLY	GND	BLACK
14	CN_14	POWER SUPPLY(option)	+12V	RED

❖ Can be selected +12V or +24V.

Table.4

Pin	Assign	Function		Harness Color (WEL-RC601)
1	CN_ 1	POWER SUPPLY	GND	BLACK
2	CN_ 2	POWER SUPPLY(option)	+24V	ORANGE
3	CN_ 3	POWER SUPPLY	GND	BLACK
4	CN_ 4	N/A	N/A	BROWN
5	CN_ 5	N/A	N/A	YELLOW
6	CN_ 6	POWER SUPPLY	GND	BLACK
7	CN_ 7	N/A	N/A	GREEN
8	CN_ 8	N/A	N/A	BLUE
9	CN_ 9	N/A	N/A	PURPLE
10	CN_10	N/A	N/A	GRAY
11	CN_11	N/A	N/A	WHITE
12	CN_12	N/A	N/A	PINK
13	CN_13	POWER SUPPLY	GND	BLACK
14	CN_14	POWER SUPPLY(option)	+12V	RED

❖ Can be selected +12V or +24V.


Table.5

Pin	Function	I/O	Harness Color (WEL-R7U06)
1	GND	N/A	BLUE
2	N/A	N/A	N/A
3	N/A	N/A	N/A
4	N/A	N/A	N/A
5	N/A	N/A	N/A
6	+5V	O	WHITE
7	RXD	I	BLACK
8	TXD	O	PURPLE

5-1-2. I/O Circuits

Hopper & Pulse Interface Customer Recommend Circuit.


Figure.9

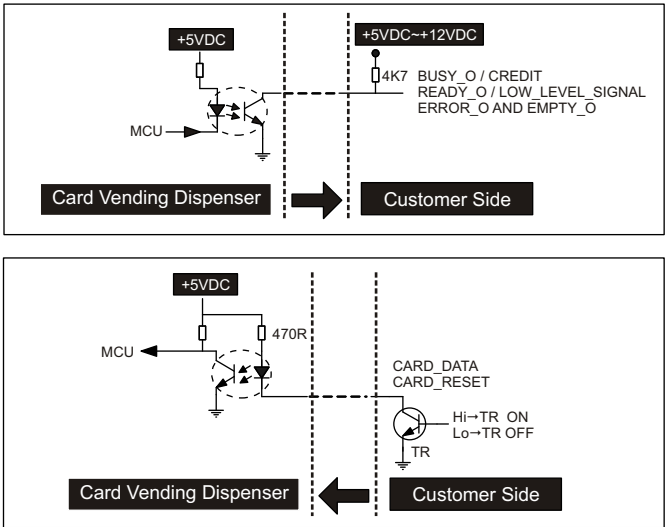

< EH Models only >


Hopper & Pulse Interface Customer Recommend Circuit.

Figure.10

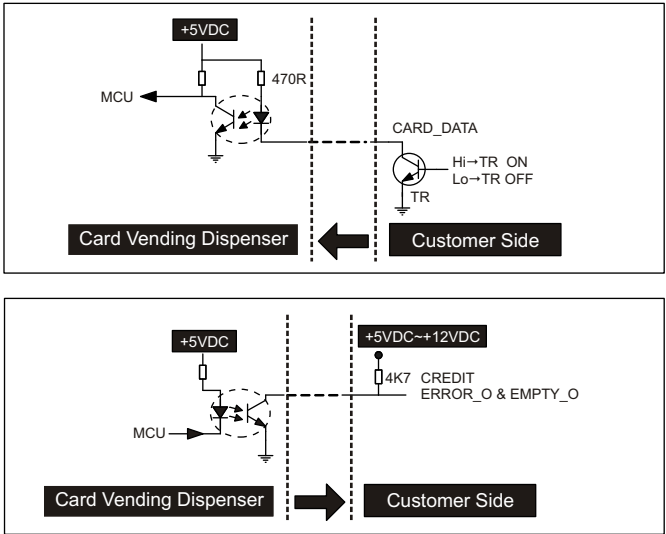

RS232 Interface Customer Recommend Circuit.

Figure.11

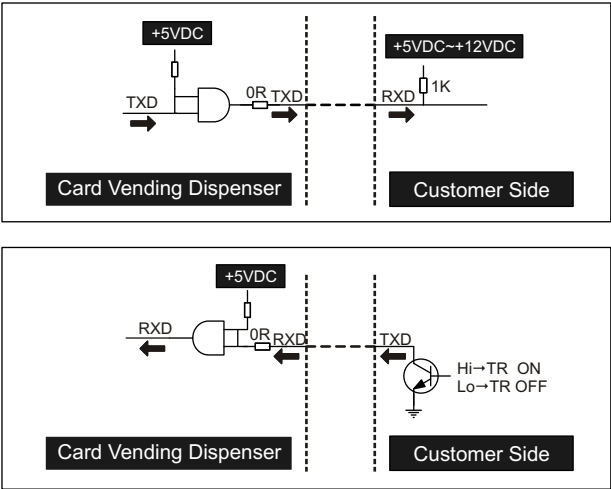

5-2. DIP Switch Setting

A serial DIP switches are set on rare CVD series(as figure 12). According to different interfaces and other functions which are used by users, DIP switch settings could be varied to fit users' needs. For more information about DIP switch setting, please refer to the following charts.

◆ Function Setting:

A. Retry Times Setting:

Retry Times	SW1	SW2
1	OFF	OFF
2	ON	OFF
4	OFF	ON
8	ON	ON

Table.6

(★) Pulse Default.

For Low Level sensor models only

B. Interface Setting:

Interface	SW3	SW4
Pulse	OFF	OFF
Hopper	OFF	ON
RS232	ON	OFF
N/A	ON	ON

Table.7

C. Card Dispenser Signal Setting:

Signal	SW5
Normal Low (Active High)	OFF
Normal High (Active Low)	ON

Table.8

(★) Pulse Default.


D. RS232 ID Setting:

RS232 ID	SW6	SW7
No.1 CVD Setting	OFF	OFF
No.2 CVD Setting	OFF	ON
No.3 CVD Setting	ON	OFF
No.4 CVD Setting	ON	ON

Table.9

(★) RS232 Default.

Figure.12



E. Send credit mode:

	Send credit	SW8	Table.10
★	Before card taking out	OFF	
	After card taking out	ON	(★) Default

Note: For EL(Pulse, Hopper).

For E models only

B. Pulse Memory Setting

For Pulse Memory:(Max 20)

	Pulse Memory	SW4	Table.11
★	Memory ON	OFF	
	Memory OFF	ON	(★) Pulse Default

Note: Maximum 20 pulses per request. Any additional requests will be accumulated to maximum 20 pulses for card needs to be dispensed.

For EH models only

B. Card Dispenser Signal Setting:

	Signal	SW3	Table.12
★	Normal Low (Active High)	OFF	
	Normal High (Active Low)	ON	(★) Default

C. Interface Setting:

	Interface	SW4	Table.13
★	Hopper	OFF	
	Pulse(non-Memory)	ON	(★) Default

For ER models only


B. RS232 ID Setting:

	RS232 ID	SW3	SW4	Table.14
★	No.1 CVD Setting	OFF	OFF	
	No.2 CVD Setting	ON	OFF	
	No.3 CVD Setting	OFF	ON	
	No.4 CVD Setting	ON	ON	(★) RS232 Default.


5-3. Time Chart

Pulse <For E Models only>

Normal Card Dispensing :

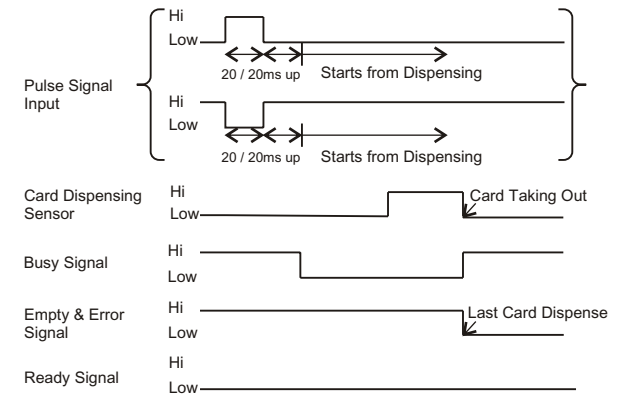

Card Dispensing Disable :

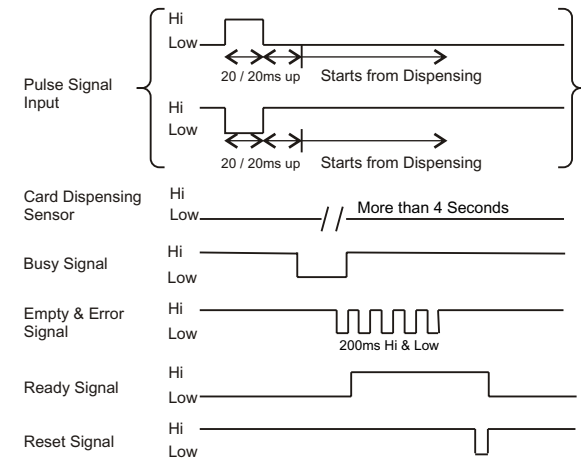

Card Taking Forgotten:

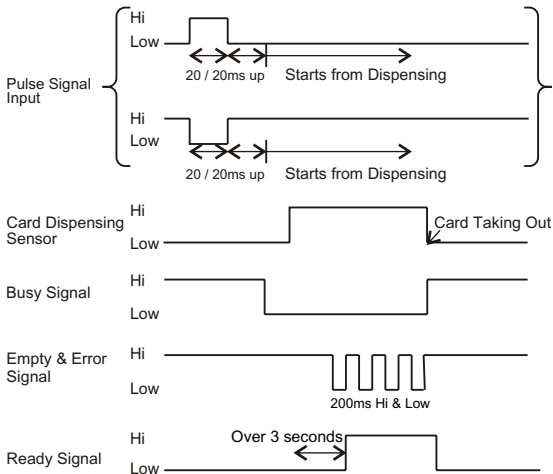


Figure.15

Pulse <For EH Models only>

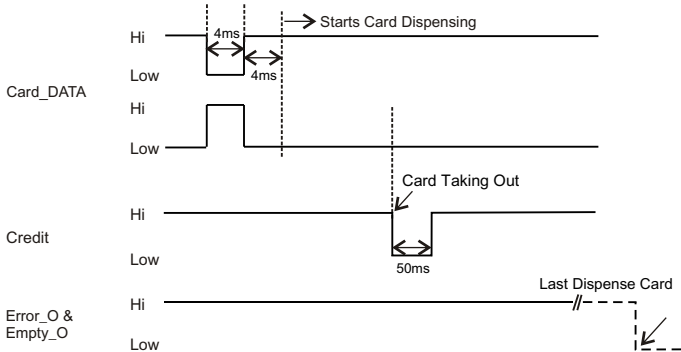


Figure.16

Hopper <For DE Models only>

Normal Card Dispensing :

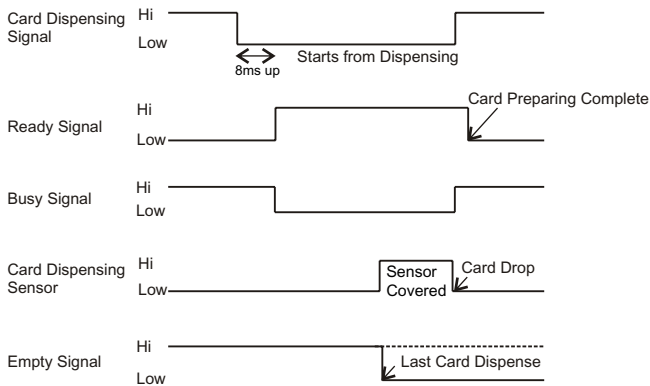


Figure.17

Serial Card Dispensing :

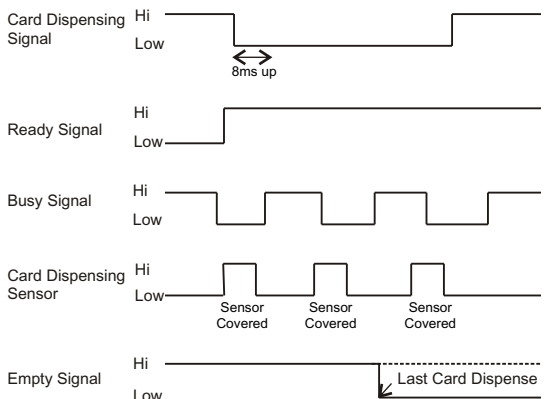


Figure.18

Card Dispensing Disable :

Figure.19

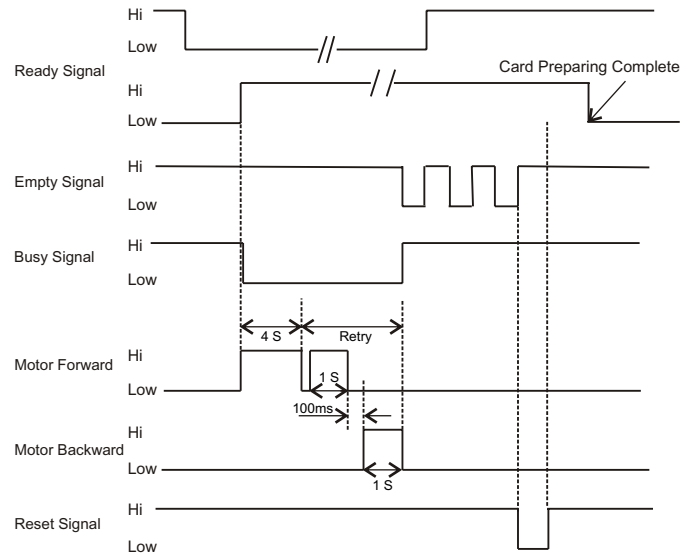
**Hopper <For EH Models only>**

Figure.20

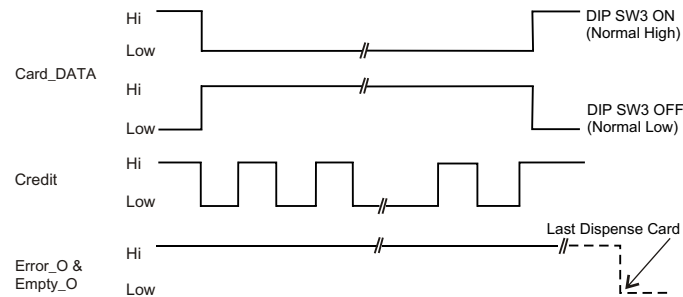
**Pulse <For Low Level sensor Models only>**Normal Card Dispensing :

Figure.21




Card Low Level Detected after Dispensing :

Figure.22



Last Card Dispensing :

Figure.23

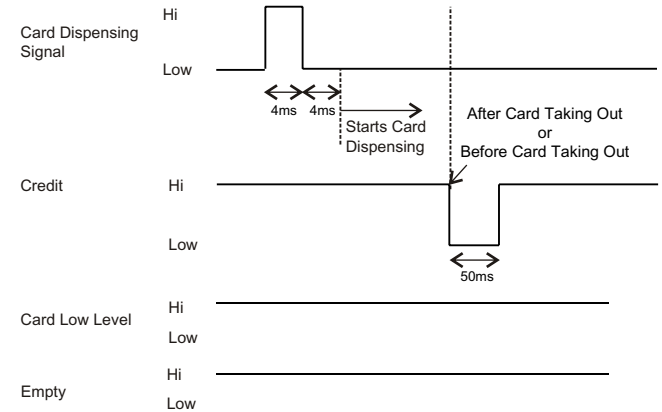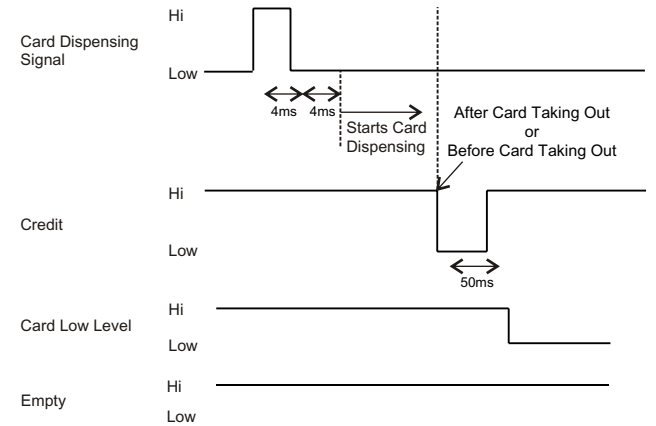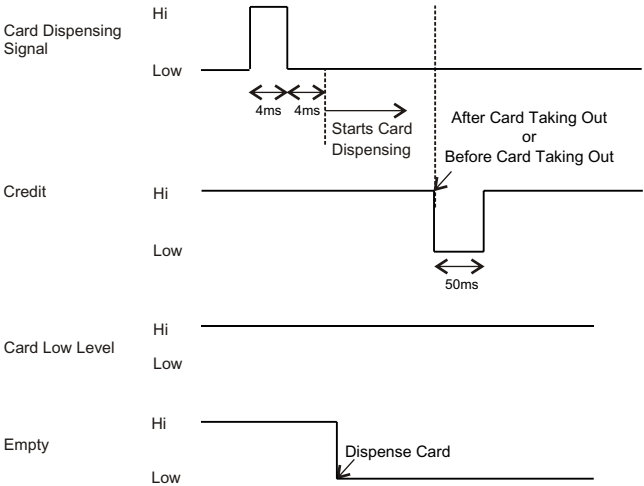

5-4. Communication Protocol

For RS232 Interface only

Baud rate : 9600, E, 8,1

Byte1 : ID Number 1 ~ 4

Byte2 : CVD Request Status / CVD Command

Table.15

Byte2		
Controller	Direction	CVD
Request CVD Status(37H)	➡	Empty(22H) Ready(23H) Busy(24H) Error(25H) Card Low Level(26H)
	⬅	
CVD Reset command(40H)	➡	
	⬅	ACK(50H) NAK(4BH)
CVD Card Out(42H)	➡	
	⬅	ACK(50H) NAK(4BH)

Note : 1. Reset command is only accepted by CVD in error status.

2. As for CVD status inquiry, "Card Low Level" (26H) status shall be sent to controller instead of "Ready" (23H) status when low level sensor is triggered.

6. Operation:

6-1. How to adjust thickness of cards

1. Loose two fixing-screws clockwise to move gate up/down.
2. Turn adjusting-screw clockwise to move the gate upward.
3. Put one sample card into gate and turn adjusting-screw simultaneously until the card can pass the gate smoothly.
4. Turn adjusting-screw clockwise (gate upward) few scales.

Thickness of a Card	Turning Scale	Table.15
0.2 ~ 0.3mm	1 grid	
0.4 ~ 0.5mm	2 grids	
0.6 ~ 0.8mm	3 grids	
0.9 ~ 1.0mm	4 grids	

5. Fasten the fixing-screws.

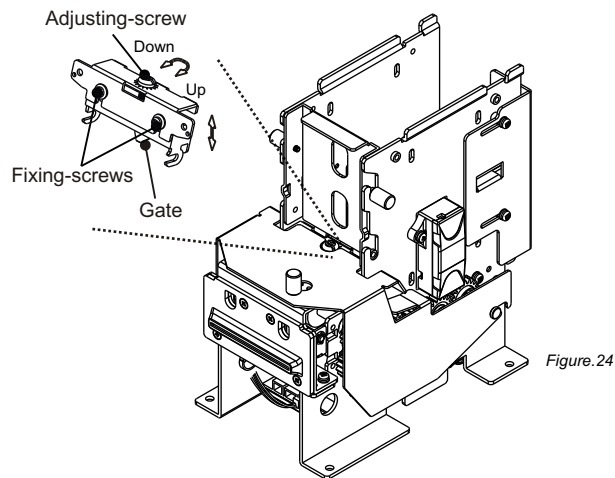


Figure.24

6-2. How to fill cards

A. Fill cards from the front:

1. Loose manual screw, and take out door plate.
2. Take out weighting-plate.
3. Fill cards in.
4. Place weighting-plate on top of cards.
5. Put door plate back and tighten manual screw.

B. Fill cards from the rear:

1. Take out weighting-plate.
2. Fill cards in.
3. Place weighting-plate on top of cards.

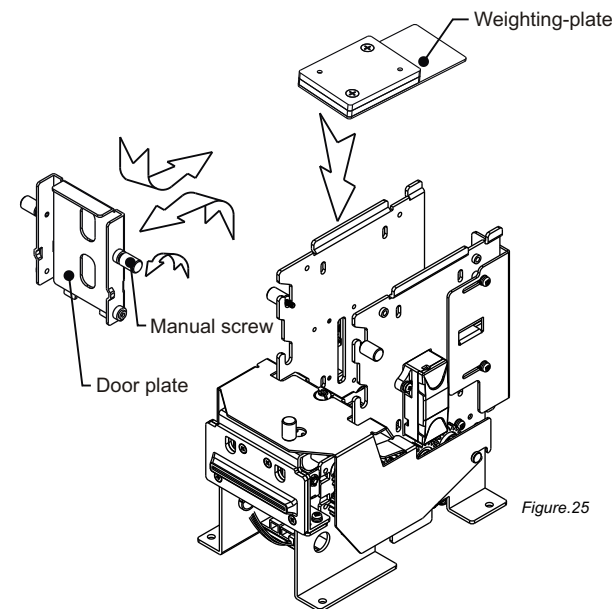


Figure.25

6-3. Low Level Sensor Function

The low level sensor is designed for CVD series to show low level status of cards. When the cards amount of CVD series is less than low level, the alert light will remind users re-filling cards up before card dispenser running out of cards.



Low level should be set within five minutes after power is applied to CVD series (EL/ ELR/ DEL/ DELR).

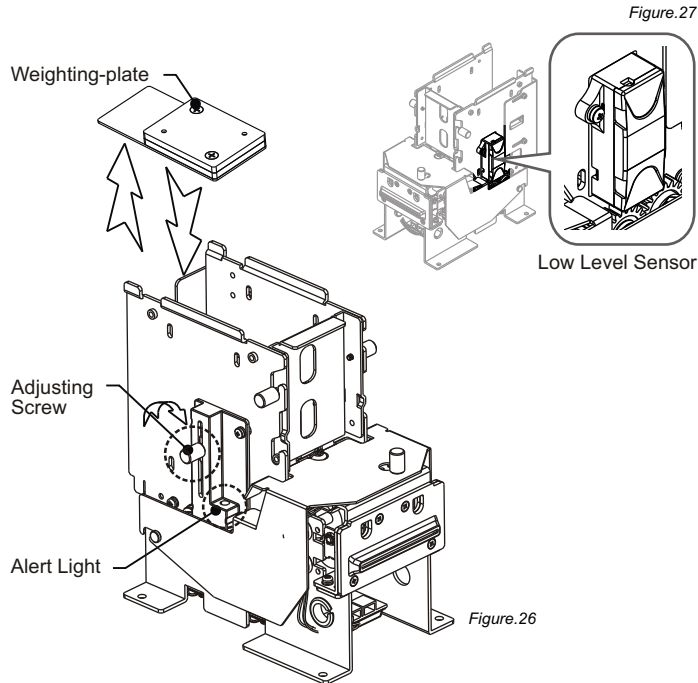


Figure.27

Low Level Sensor

Figure.26

Low Level Adjustment:

To adjust low level cards:


1. Set up the amount of cards for low level to fit your needs.
The acceptance thickness of low level is approx. 10~60 cards.
(According to card thickness 0.2mm)
 2. Take weighting-plate out of the unit.
 3. Put the amount of cards that you set up for low level in the unit.
Then put weighting-plate back in the unit.
 4. Clockwise tighten adjusting screw until alert light lights up to adjust the position of sensor.
- Note:** For a flexible low level setup, ICT suggests you to save some space between weighting-plate and cards (± 2 cards).
5. Put one more card in unit to turn alert light off. If the alert light is not off, please return to step 4 and do it again.
 6. Low level sensor adjusting completely.



To keep sensor is always in position on the frames, do not loosen adjusting screw fiercely during adjusting.

7. Maintenance

Please follow the notice as below for routine maintenance:

 Maintenance Notice <i>(Any improper maintenance will result invalid warranty.)</i>	
Recommended	Mild, non-abrasive, soap water.
DO NOT USE	Organic solvent , Alcohol, Volatility liquid.

8. Troubleshooting:

Table.16

Status	Corrective Actions
Card Dispensing Error	1. Check if there is any error signals or empty signal. 2. Check if there is any foreign objects block dispensing slot.
Continue Dispensing Cards after Power Applied (Hopper Mode)	1. Make sure DIP Switch settings are correct. 2. Check if dispensing signal is normal.
Card Preparing Error	Re-adjust thickness of card. (Refer to 6-1)



If the error can not be solved after corrective actions or happen again, please contact ICT for technical support.



International Currency Technologies Corporation

Ji-Hong Building, No 24, Alley 38, Lane 91, Nei-hu Rd., Sec. 1, Taipei, Taiwan, R.O.C.

Tel: 886-2-2797-1238 · Fax: 886-2-2797-1634

sales@ictgroup.com.tw (For Sales) · rma@ictgroup.com.tw (For Customer Service)

Website: www.ictgroup.com.tw